


DOCTOR BLADE OSCILLATORS

COMPACT PNEUMATIC DOCTOR BLADE OSCILLATOR FOR DRY AND WET END APPLICATIONS

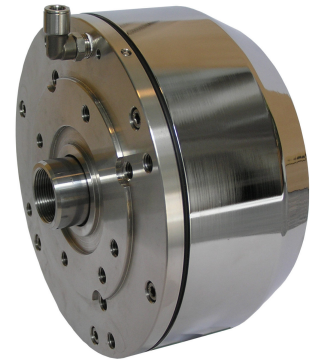

Benefits

- Same product for both dry and wet end applications
- Maintenance free life-time expectancy over 5 years
- External parts in contact with ambient made of AISI316
- Effective air cushioning system eliminates vibration and dwell of the doctor blade
- Compact size and light weight
- No lubrication needed
- Adjustable speed and stroke length
- Flexible mounting options

[Compact Pneumatic Doctor Blade Oscillator brochure](#)
[Download](#)

TECHNICAL DETAILS

Thrust force	11 kN & 22 kN versions at 6 bar
Pressure range	2,5-10,0 bar
Ambient temperature range	-5...+150°C
Speed range	recommended number of back-and forth strokes 3...5 strokes/min
Stroke length	Factory set 16 mm, adjustable range 10-16 mm in steps of 2 mm